


## DS-2CE56H1T-ITM 5 MP HD EXIR Turret Camera



### Key Features

- 5 megapixel high-performance CMOS
- HD analog output, up to 5 MP resolution
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- True Day/Night
- OSD menu, DNR, Smart IR
- EXIR technology, up to 20 m IR distance
- IP67
- Up the Coax (HIKVISION-C)

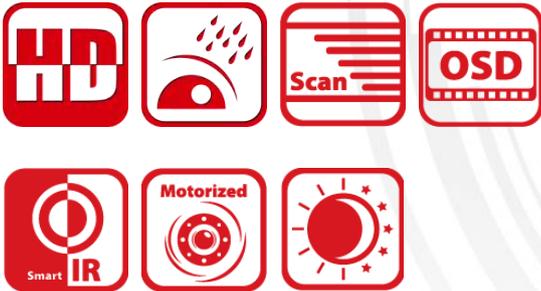

[www.hikvision.com](http://www.hikvision.com)


## Specifications

| <b>Camera</b>            |  |
|--------------------------|--|
| Image Sensor             | 5 MP CMOS image sensor   |
| Effective Pixels         | 2592 (H) × 1944 (V)  |
| Min. illumination        | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR  |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s<br>NTSC: 1/30 s to 1/50,000 s                                |
| Lens                     | 2.8 mm, 3.6 mm, 6 mm fixed focal Lens  |
| Horizontal Field of View | 86.5° (2.8 mm), 70.1° (3.6 mm), 46° (6 mm)   |
| Lens Mount               | M12  |
| Day & Night              | ICR  |
| Angle Adjustment         | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360°                                   |
| Synchronization          | Internal synchronization   |
| Video Frame Rate         | 2592 × 1944 @ 20fps  |
| HD Video Output          | 1 HD analog output   |
| <b>Menu</b>              |  |
| AGC                      | Support  |
| D/N Mode                 | Auto/Color/BW (Black and White)  |
| White Balance            | ATW/MWB  |
| BLC                      | Support  |
| Language                 | English, Chinese   |
| Functions                | Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR |
| <b>General</b>           |  |
| Operating Conditions     | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)           |
| Power Supply             | 12 V DC ± 30%  |
| Power Consumption        | Max. 5 W   |
| Protection Level         | IP67   |
| IR Range                 | 10 to 20 m   |
| Communication            | Up the coax, Protocol: HIKVISION-C (TVI output)  |
| Dimensions               | 91 mm × 82.6 mm × 68.3 mm (3.58" × 3.25" × 2.69")                                      |
| Weight                   | Approx. 350 g (0.77 lb)  |

## Order Models

DS-2CE56H1T-ITM

## Dimensions

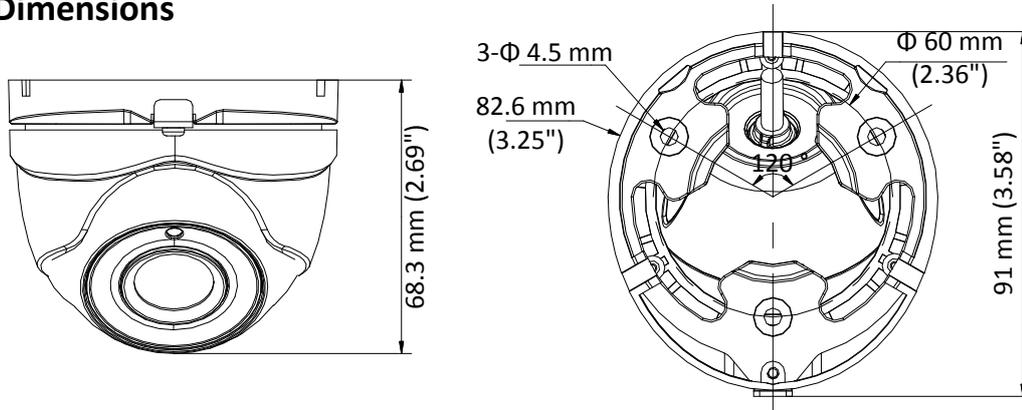

## Accessories



DS-1272ZJ-110-TRS

Wall Mounting Bracket



DS-1275ZJ

Vertical Pole Mounting Bracket



DS-1276ZJ

Corner Mounting Bracket



DS-1280ZJ-XS

Junction Box



DS-1H18

Video Balun

Distributed by

### ООО "Компания Строимир"

г. Киев, ул. Борщаговская 154А, оф. 435  
 +38 (044) 331-15-43 info@smartel.ua  
 www.smartel.ua

### Headquarters

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
 overseasbusiness@hikvision.com

**Hikvision USA**  
 T +1-909-895-0400  
 sales.usa@hikvision.com

**Hikvision Italy**  
 T +39-0438-6902  
 info.it@hikvision.com

**Hikvision Singapore**  
 T +65-6684-4718  
 sg@hikvision.com

**Hikvision Europe**  
 T +31-23-5542770  
 saleseuro@hikvision.com

**Hikvision France**  
 T +33(0)1-85-330-444  
 info.fr@hikvision.com

**Hikvision Oceania**  
 T +61-2-8599-4233  
 salesau@hikvision.com

**Hikvision Middle East**  
 T +971-4-8816086  
 salesme@hikvision.com

**Hikvision Spain**  
 T +34-91-737-16-55  
 info.es@hikvision.com

**Hikvision Hong Kong**  
 T +852-2151-1761

**Hikvision Russia**  
 T +7-495-669-67-99  
 saleru@hikvision.com

**Hikvision Poland**  
 T +48-22-460-01-50  
 poland@hikvision.com

**Hikvision Canada**  
 T +1-909-895-0400  
 sales.usa@hikvision.com

**Hikvision India**  
 T +91-22-28469900  
 sales@pramahikvision.com

**Hikvision UK**  
 T +44-1628-9021-4  
 support.uk@hikvision.com