

DS-2CE56D8T-IRS 2 MP Ultra-Low Light Dome Camera



Key Features

- 2 MP high performance CMOS
- Ultra-low light
- 1920 × 1080 resolution
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- 120 dB true WDR, 3D DNR
- Smart IR, up to 20 m IR distance
- Built-in microphone
- Up the coax (HIKVISION-C)



www.hikvision.com


Specifications

Camera	
Image Sensor	2 megapixel progressive CMOS sensor
Signal System	PAL/NTSC
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Resolution	1920 (H) × 1080 (V)
Min. illumination	0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Slow Shutter	Max. 16 times
Lens	2.8 mm, 3.6 mm, 6 mm fixed focal lens
Horizontal Field of View	94.5° (2.8 mm), 79.1° (3.6 mm), 50° (6 mm)
Lens Mount	M12
Day & Night	IR cut filter
Angle Adjustment	Pan: -30° to 30°, Tilt: 0° to 80°, Rotate: -180° to 180°
Synchronization	Internal synchronization
Ture WDR	> 120 dB
Menu	
AGC	Support
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MANUAL
Privacy Mask	ON/OFF, 4 programmable privacy masks
Motion Detection	4 programmable motion areas
Backlight Compensation	WDR/BLC/OFF
3D DNR (Digital Noise Reduction)	Level 1 to 10
Language	English, Chinese
Functions	Brightness, sharpness, mirror, smart IR
Interface	
Video Out	1 BNC
Audio In	Built-in microphone
Audio Out	1 RCA
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (no condensation)
Power Supply	12 VDC±30%
Power Consumption	Max. 5 W
Material	Metal & plastic
IR Range	Up to 20 m
Dimensions	97 mm × 99.5 mm × 46.6 mm (3.82" × 3.92" × 1.83")
Weight	Approx. 300 g (0.66 lb.)

Order Models

DS-2CE56D8T-IRS

Dimensions

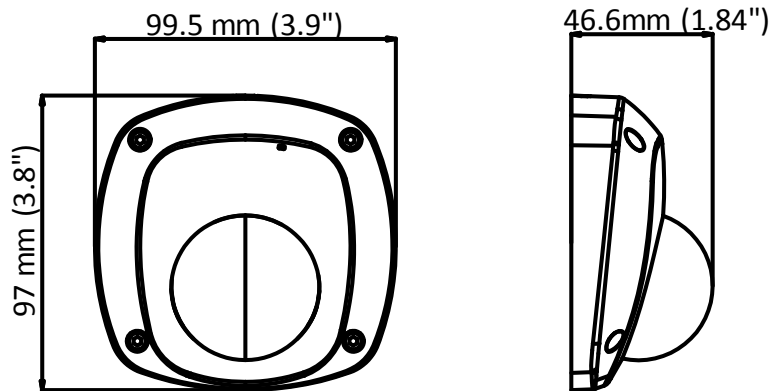

Distributed by

ООО "Компания Строимир"
 г. Киев, ул. Борщаговская 154А, оф. 435
 +38 (044) 331-15-43 info@smartel.ua
 www.smartel.ua



Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86 571 8807 5998
 overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-885-0400
 sales.usa@hikvision.com

Hikvision Europe
 T +31-23-55-42-770
 info.eu@hikvision.com

Hikvision Middle East
 T +971-4-8816086
 sa.eme@hikvision.com

Hikvision Russia
 T +7-495-668-57-99
 saleru@hikvision.com

Hikvision India
 T +91-22-28463900
 sales@premahikvision.com

Hikvision Italy
 T +39-0438-6902
 info.it@hikvision.com

Hikvision France
 T +33(0)1-65-330-450
 info.fr@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
 info.es@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
 poland@hikvision.com

Hikvision UK
 T +01628-902140
 support.uk@hikvision.com

Hikvision Singapore
 T +65-6684-4718
 sg@hikvision.com

Hikvision Oceania
 T +61-2-8599-4233
 salesau@hikvision.com

Hikvision Canada
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Korea
 T +82-31-731-8841
 sales.korea@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
 letam.support@hikvision.com

Hikvision Africa
 T +27 (10) 0351172
 sale.africa@hikvision.com

Hikvision Hong Kong
 T +852-2151-1761